arXiv:1301.3581v1 [math.ST] 16 Jan 2013

D-optimal Factorial Designs under Generalized Linear Models

Jie Yang[1] and Abhyuday Mandal[2]
[1]University of Illinois at Chicago and [2]University of Georgia

January 17, 2013

Abstract:

Generalized linear models (GLMs) have been used widely for modeling the mean response both for discrete and continuous random variables with an emphasis on categorical response. Recently Yang, Mandal and Majumdar (2012b) considered full factorial and fractional factorial locally D-optimal designs for binary response and two-level experimental factors. In this paper, we extend their results to a general setup with response belonging to a single-parameter exponential family and for multi-level predictors.

Key words and phrases: Generalized linear model, factorial design, D-optimality, information matrix, lift-one algorithm, exchange algorithm

1 Introduction

Binary responses and count data are usually modelled using generalized linear models (GLMs). GLMs have been widely used for modelling the mean response both for discrete and continuous random variables with an emphasis on categorical response. Although the methods of analyzing data using these models have been discussed in depth in the literature (McCullagh and Nelder (1989), Dobson and Barnett (2008)), only a limited number of results are available for the choice of optimal design of experiments under GLMs (Khuri et al. (2006), Woods et al. (2006), Stufken and Yang (2012)). Recently Yang, Mandal and Majumdar (2012a) obtained some theoretical results on locally D-optimal factorial designs for 2^2 experiments with binary response. In a subsequent paper, Yang, Mandal and Majumdar (2012b) considered D-optimal factorial designs with k two-level predictors and binary response. In this paper, we extend their results to a much more general setup with multi-level predictors and a response belonging to a single-parameter exponential family.

Following Yang, Mandal and Majumdar (2012a, 2012b), we consider locally optimal designs, as Fisher's information matrix contains the unknown parameters, and so does the D-optimality criterion. The optimality criterion can be written in terms of the variances, or measures of information, at each of the design points. Note that these variances depend on the parameters through the link function. The locally D-optimal designs can be quite different from the uniform design which is commonly used in practice, especially when some of the regression parameters stay significantly away from zero (see also Yang, Mandal and Majumdar (2012b)). For illustration suppose we consider a linear predictor involving two two-level factors, namely, `family history` (x_1) and `physical exercise` (x_2), which leads to the linear predictor $\eta = \beta_0 + \beta_1 x_1 + \beta_2 x_2$. If we have solid reasons to believe that `family history` is a much more dominant factor than `physical exercise`, and on the basis of prior knowledge, an initial choice of parameters $(\beta_0, \beta_1, \beta_2) = (2, 2, 0.05)$ is reasonable, then the optimal allocation of 100 experimental units will be $(6, 28, 33, 33)$ on the four distinct combinations of factor levels, namely, the design points. On the other hand, if the practitioner decides to use the popular uniform design $(25, 25, 25, 25)$ with equal number of replicates per design point, then the relative loss of efficiency is about 5%.

This paper is organized as follows. In section 2, we provide the preliminary setup for the generalized linear models under consideration. We discuss the characterization of locally D-optimal designs in section 3. In section 4 we discuss our search algorithms, both theoretically and numerically, for obtaining optimal approximate and exact designs. In section 5, we illustrate our results with two real examples. We conclude with some remarks in section 6.

2 Preliminary Setup: Generalized Linear Models

In this paper, we consider experiments with a univariate response Y which follows an exponential family with a single parameter θ in canonical form

$$f(y;\theta) = \exp\{yb(\theta) + c(\theta) + d(y)\}\ ,$$

where $b(\theta), c(\theta)$ and $d(y)$ are known functions. For examples,

$$f(y;\theta) = \begin{cases} \exp\left\{y \log\frac{\theta}{1-\theta} + \log(1-\theta)\right\}, & \text{binary } Y \sim \text{Bernoulli}(\theta) \\ \exp\left\{y\log\theta - \theta - \log y!\right\}, & \text{count response } Y \sim \text{Poisson}(\theta) \\ \exp\left\{y\frac{-1}{\theta} - k\log\theta + \log\frac{y^{k-1}}{\Gamma(k)}\right\}, & Y \sim \text{Gamma}(k,\theta), k > 0 \text{ fixed} \\ \exp\left\{y\frac{\theta}{\sigma^2} - \frac{\theta^2}{2\sigma^2} - \frac{y^2}{2\sigma^2} - \frac{1}{2}\log(2\pi\sigma^2)\right\}, & y \sim N(\theta,\sigma^2), \sigma^2 > 0 \text{ fixed.} \end{cases}$$

Consider independent random variables $Y_1, \ldots, Y_n$ with corresponding covariates or predictors $\mathbf{x}_1, \ldots, \mathbf{x}_n$, where $\mathbf{x}_i = (x_{i1}, \ldots, x_{id})' \in \mathbb{R}^d$. Under a generalized linear model, there exists a link function g and parameters of interest $\boldsymbol{\beta} = (\beta_1, \ldots, \beta_d)'$, such that

$$E(Y_i) = \mu_i \text{ and } \eta_i = g(\mu_i) = \mathbf{x}_i^T \boldsymbol{\beta}.$$

It is known that, for example, see McCullagh and Nelder (1989) or Dobson and Barnett (2008),

$$\begin{aligned} E(Y_i) &= -\frac{c'(\theta_i)}{b'(\theta_i)}\ , \\ \mathrm{var}(Y_i) &= \frac{b''(\theta_i)c'(\theta_i) - c''(\theta_i)b'(\theta_i)}{b'(\theta_i)^3}\ , \end{aligned}$$

provided $b(\theta)$ and $c(\theta)$ are twice differentiable. Since Y_i's are independent, the $d \times d$ Fisher information matrix $\mathbf{I} = (I_{jk})$ can be obtained by

$$I_{jk} = E\left(\frac{\partial l}{\partial \beta_j}\frac{\partial l}{\partial \beta_k}\right) = \sum_{i=1}^{n} \frac{x_{ij}x_{ik}}{\mathrm{var}(Y_i)} \left(\frac{\partial \mu_i}{\partial \eta_i}\right)^2,$$

where $l = \log f(Y;\theta)$ could be written as a function of $\boldsymbol{\beta}$ too.

Suppose there are only m distinct predictor combinations $\mathbf{x}_1, \ldots, \mathbf{x}_m$ with numbers of replicates $n_1, \ldots, n_m$, respectively. Then

$$I_{jk} = \sum_{i=1}^{m} \frac{n_i x_{ij} x_{ik}}{\mathrm{var}(Y_i)} \left(\frac{\partial \mu_i}{\partial \eta_i}\right)^2 = n \sum_{i=1}^{m} x_{ij} \frac{p_i}{\mathrm{var}(Y_i)} \left(\frac{\partial \mu_i}{\partial \eta_i}\right)^2 x_{ik}$$

where $p_i = n_i/n$, $i = 1, \ldots, m$. That is, the information matrix $\mathbf{I}$ can written as

$$\mathbf{I} = nX^T W X$$

where $X = (\mathbf{x}_1, \ldots, \mathbf{x}_m)^T$ is an $m \times d$ matrix, and $W = \mathrm{diag}(p_1 w_1, \ldots, p_m w_m)$ with

$$w_i = \frac{1}{\mathrm{var}(Y_i)} \left(\frac{\partial \mu_i}{\partial \eta_i}\right)^2.$$

For typical applications, $\mathbf{I}$ or $X^T W X$ is nonsingular.

Suppose the link function g is one-to-one and differentiable. Further assume that μ_i itself determines $\mathrm{var}(Y_i)$, that is, there exists a function h such that $\mathrm{var}(Y_i) = h(\eta_i)$. Let $\nu = \left((g^{-1})'\right)^2/h$. Then $w_i = \nu(\eta_i) = \nu\left(\mathbf{x}_i{}'\boldsymbol{\beta}\right)$ for each i. We illustrate it using the four cases below.

Example 2.1: Binary response Suppose $Y_i \sim$Bernoulli(μ_i). Then $h = g^{-1}(1-g^{-1})$.

For commonly used link function g,

$$\nu(\eta) = \begin{cases} \frac{1}{2+e^{\eta}+e^{-\eta}}\ , & \text{for logit link;} \\ \frac{\phi(\eta)^2}{\Phi(\eta)[1-\Phi(\eta)]}\ , & \text{for probit link;} \\ (\exp\{e^{\eta}\}-1)\left[\log\left(1-\exp\{-e^{\eta}\}\right)\right]^2\ , & \text{for complementary log-log link;} \\ \frac{\exp\{2\eta-e^{\eta}\}}{1-\exp\{-e^{\eta}\}}\ , & \text{for log-log link.} \end{cases}$$

Example 2.2: Poisson count Suppose $Y_i \sim$Poisson(μ_i). For the canonical link function $g = \log$, $h = \nu = \exp$ and $w_i = \nu(\eta_i) = \exp\{\eta_i\}$ for each i.

Example 2.3: Gamma response Suppose $Y_i \sim$ Gamma$(k, \mu_i/k)$ with known $k > 0$. For the canonical link function $g(\mu) = 1/\mu$, $h(\eta) = 1/(k\eta^2)$, $\nu(\eta) = k/\eta^2$ and $w_i = \nu(\eta_i) = k/\eta_i^2$. A special case is $k = 1$ which corresponds to the exponential distribution.

Example 2.4: Normal response Suppose $Y_i \sim N(\mu_i, \sigma^2)$ with known $\sigma^2 > 0$. For the canonical link function $g(\mu) \equiv \mu$, $h(\eta) \equiv \sigma^2$, $\nu(\eta) \equiv 1/\sigma^2$ and $w_i \equiv 1/\sigma^2$.

3 Locally D-optimal Designs

In this paper, we consider experiments with a design matrix $X = (\mathbf{x}_1, \ldots, \mathbf{x}_m)^T$ which consists of m distinct experimental settings, that is, m distinct combinations of values of d covariates. The response Y_i follows a single-parameter exponential family under the generalized linear model $\eta_i = g(E(Y_i)) = \mathbf{x}_i^T\boldsymbol{\beta}$. For instance, in a 2^3 experiment with binary response, $\eta = \beta_0 + \beta_1 x_1 + \beta_2 x_2 + \beta_3 x_3 + \beta_{23} x_2 x_3$ represents a model that includes all the main effects and the two-factor interaction of factors 2 and 3. The aim of the experiment is to obtain inferences about the parameter vector of factor effects $\boldsymbol{\beta}$; in the preceding example, $\boldsymbol{\beta} = (\beta_0, \beta_1, \beta_2, \beta_3, \beta_{23})'$.

In the framework of locally optimal designs, we assume that $w_i = \nu(\mathbf{x}_i'\boldsymbol{\beta})$, $i = 1, \ldots, m$, determined by regression coefficients $\boldsymbol{\beta}$ and link function g, are known. For typical applications, $w_i > 0$, $i = 1, \ldots, m$. Then the design problem we consider here is to find the "optimal" allocation of n experiment units into $(n_1, \ldots, n_m)'$ such that $n_1 + \cdots + n_m = n$, known as *exact design*, or alternatively, find the "optimal" proportion $p_i = n_i/n$, $i = 1, \ldots, m$, known as *approximate design*. In this paper, we mainly focus on the approximate designs, that is, $\mathbf{p} = (p_1, \ldots, p_m)'$ such that $p_1 + \cdots + p_m = 1$. Since the maximum likelihood estimator of $\boldsymbol{\beta}$ has an asymptotic covariance matrix that is the inverse of $nX'WX$, a *(locally) D-optimal design* is a $\mathbf{p}$ which maximizes

$$f(\mathbf{p}) = |X'WX|.$$

For example, for the 2^2 experiment with main-effects model and binary response, $f(\mathbf{p}) = 16(p_1p_2p_3w_1w_2w_3 + p_1p_2p_4w_1w_2w_4 + p_1p_3p_4w_1w_3w_4 + p_2p_3p_4w_2w_3w_4)$. See Yang, Mandal and Majumdar (2012a) for a detailed analysis of this problem. For general cases, the following lemma expresses the objective function $f(\mathbf{p}) = |X'WX|$ is an order-d homogeneous polynomial of $p_1, \ldots, p_m$. This is useful in determining the optimal p_i's. See González-Dávila, Dorta-Guerra and Ginebra (2007) and Yang, Mandal and Majumdar (2012b).

Lemma 3.1 *Let $X[i_1, i_2, \ldots, i_d]$ be the $d \times d$ sub-matrix consisting of the i_1th, …, i_dth rows of the design matrix X. Then*

$$f(\mathbf{p}) = |X'WX| = \sum_{1 \le i_1 < \cdots < i_d \le m} |X[i_1, \ldots, i_d]|^2 \cdot p_{i_1}w_{i_1} \cdots p_{i_d}w_{i_d}.$$

Based on Lemma 3.1, Yang, Mandal and Majumdar (2012b) developed characterization theorems for D-optimal designs and saturated D-optimal designs for two-level factors with $x_{ij} \in \{-1, 1\}$ (Yang, Mandal and Majumdar (2012b), section 3.1). Note that the entries of X in Lemma 3.1 can be any real number, which allows us to extend their results to multiple-level factors. Following Yang, Mandal and Majumdar (2012b) we define for each $i = 1, \ldots, m$,

$$f_i(z) = f\left(\frac{1-z}{1-p_i}p_1, \ldots, \frac{1-z}{1-p_i}p_{i-1}, z, \frac{1-z}{1-p_i}p_{i+1}, \ldots, \frac{1-z}{1-p_i}p_m\right), \quad 0 \le z \le 1. \quad (1)$$

Note that $f_i(z)$ is well defined for all $\mathbf{p}$ satisfying $f(\mathbf{p}) > 0$. Lemma 7.1 and Lemma 7.2 in Yang, Mandal and Majumdar (2012b) could be applied for our case too. Thus we obtain theorems below to characterize locally D-optimal allocations and saturated D-optimal allocations for experiments with multiple-level factors and fairly general response under GLMs. Note that the design matrix X here consists of $m \times d$ real-number entries, which generalizes the results in Yang, Mandal and Majumdar (2012b).

Theorem 3.1 *Suppose $f(\mathbf{p}) > 0$. Then $\mathbf{p}$ is D-optimal if and only if for each $i = 1, \ldots, m$, one of the two conditions below is satisfied:*

(i) $p_i = 0$ and $f_i\left(\frac{1}{2}\right) \le \frac{d+1}{2^d} f(\mathbf{p})$;

(ii) $0 < p_i \le \frac{1}{d}$ and $f_i(0) = \frac{1-p_id}{(1-p_i)^d} f(\mathbf{p})$.

Theorem 3.2 *Let $\mathbf{I} = \{i_1, \ldots, i_d\} \subset \{1, \ldots, m\}$ be an index set satisfying $|X[i_1, \ldots, i_d]| \ne 0$. Then the saturated design satisfying $p_{i_1} = p_{i_2} = \cdots = p_{i_d} = \frac{1}{d}$ is D-optimal if and only if for each $i \notin \mathbf{I}$,*

$$\sum_{j \in \mathbf{I}} \frac{|X[\{i\} \cup \mathbf{I} \setminus \{j\}]|^2}{w_j} \le \frac{|X[i_1, i_2, \ldots, i_d]|^2}{w_i}.$$

Theorem 3.1 and Theorem 3.2 are for X with real-number entries and thus can be applied with multiple-level factors. We illustrate the results using the two examples below.

Example 3.1: One two-level covariate and one three-level covariate: Suppose the design matrix X is given by

$$X = \begin{pmatrix} 1 & 1 & 1 \\ 1 & 1 & 0 \\ 1 & 1 & -1 \\ 1 & -1 & 1 \\ 1 & -1 & 0 \\ 1 & -1 & -1 \end{pmatrix}$$

Then, for example, $p_1 = p_2 = p_4 = 1/3$ is D-optimal if and only if $v_1 + 4v_2 \leq v_3$, $v_1 + v_2 + v_4 \leq v_5$ and $4v_1 + 4v_2 + v_4 \leq v_6$, where $v_i = 1/w_i$, $i = 1, \ldots, 6$. On the other hand, $p_3 = p_5 = p_6 = 1/3$ is D-optimal if and only if $v_3 + 4v_5 + 4v_6 \leq v_1$, $v_3 + v_5 + v_6 \leq v_2$ and $4v_5 + v_6 \leq v_4$.

Example 3.2: 2×3 **factorial design:** Suppose the design matrix

$$X = \begin{pmatrix} 1 & 1 & 1 & 1 \\ 1 & 1 & 0 & -2 \\ 1 & 1 & -1 & 1 \\ 1 & -1 & 1 & 1 \\ 1 & -1 & 0 & -2 \\ 1 & -1 & -1 & 1 \end{pmatrix}, \tag{2}$$

where the four columns correspond to effects I, A (two-level), B_l (three-level, linear component), and B_q (three-level, quadratic component). Then, for example, $p_1 = p_2 = p_3 = p_4 = 1/4$ is D-optimal if and only if $v_1 + v_2 + v_4 \leq v_5$ and $v_1 + v_3 + v_4 \leq v_6$; $p_2 = p_3 = p_4 = p_5 = 1/4$ is D-optimal if and only if $v_2 + v_4 + v_5 \leq v_1$ and $v_2 + v_3 + v_5 \leq v_6$; $p_3 = p_4 = p_5 = p_6 = 1/4$ is D-optimal if and only if $v_3 + v_4 + v_6 \leq v_1$ and $v_3 + v_5 + v_6 \leq v_2$.

4 Searching for D-optimal Designs

Yang, Mandal and Majumdar (2012b) developed very efficient algorithms searching locally D-optimal approximate designs or exact designs with binary response and two-level factors. Essentially the same algorithms could be used for maximizing $f(\mathbf{p}) = |X'WX|$ for more general setup, as long as X consists of m distinct d-dimensional real-number vectors and the response belongs to a single-parameter exponential family.

4.1 Lift-one algorithm for D-optimal approximate design

For finding $\mathbf{p}$ maximizing $f(\mathbf{p}) = |X'WX|$, the lift-one algorithm, as well as Lemma 7.1 and Lemma 7.2 in Yang, Mandal and Majumdar (2012b), could be applied for our case, with some modifications. Recall that $f_i(z)$ is defined in equation (1).

Lemma 4.1 *(Yang, Mandal and Majumdar, 2012b, Lemma 7.1) Suppose* $f(\mathbf{p}) > 0$. *Then for* $i = 1, \ldots, m$,

$$f_i(z) = az(1-z)^{d-1} + b(1-z)^d, \tag{3}$$

for some constants a *and* b. *If* $p_i > 0$, $b = f_i(0)$, $a = \frac{f(\mathbf{p}) - b(1-p_i)^d}{p_i(1-p_i)^{d-1}}$; *otherwise,* $b = f(\mathbf{p})$, $a = f_i\left(\frac{1}{2}\right) \cdot 2^d - b$. *Note that* $a \geq 0$, $b \geq 0$, *and* $a + b > 0$.

Lemma 4.2 *(Yang, Mandal and Majumdar, 2012b, Lemma 7.2) Let* $l(z) = az(1-z)^{d-1} + b(1-z)^d$ *with* $0 \leq z \leq 1$ *and* $a \geq 0, b \geq 0, a + b > 0$. *If* $a > bd$, *then* $\max_z l(z) = \left(\frac{d-1}{a-b}\right)^{d-1} \left(\frac{a}{d}\right)^d$ *at* $z = \frac{a-bd}{(a-b)d} < 1$. *Otherwise,* $\max_z l(z) = b$ *at* $z = 0$.

Lift-one algorithm (for multiple-level factors and single-parameter exponential family response)

1° Start with arbitrary $\mathbf{p}_0 = (p_1, \ldots, p_m)'$ satisfying $0 < p_i < 1$, $i = 1, \ldots, m$. Compute $f(\mathbf{p}_0)$.

2° Set up a random order of i going through $\{1, 2, \ldots, m\}$.

3° For each i, determine $f_i(z)$ as in expression (3). In this step, either $f_i(0)$ or $f_i\left(\frac{1}{2}\right)$ needs to be calculated according to Lemma 4.1.

4° Define $\mathbf{p}_*^{(i)} = \left(\frac{1-z_*}{1-p_i}p_1, \ldots, \frac{1-z_*}{1-p_i}p_{i-1}, z_*, \frac{1-z_*}{1-p_i}p_{i+1}, \ldots, \frac{1-z_*}{1-p_i}p_m\right)'$, where z_* maximizes $f_i(z)$ with $0 \leq z \leq 1$ (see Lemma 4.2). Note that $f(\mathbf{p}_*^{(i)}) = f_i(z_*)$.

5° Replace $\mathbf{p}_0$ with $\mathbf{p}_*^{(i)}$, $f(\mathbf{p}_0)$ with $f(\mathbf{p}_*^{(i)})$.

6° Repeat 2° $\sim$ 5° until convergence, that is, $f(\mathbf{p}_0) = f(\mathbf{p}_*^{(i)})$ for each $i = 1, \ldots, m$.

Convergence and performance of lift-one algorithm: To guarantee the convergence, we may modify the lift-one algorithm as in Yang, Mandal and Majumdar (2012b, Section 3.3.1). A similar proof could be applied here to show that (1) if the lift-one algorithm or its modified version converges at $\mathbf{p}^*$, then $\mathbf{p}^*$ is D-optimal; (2) the modified lift-one algorithm is guaranteed to converge (Yang, Mandal and Majumdar, 2012b, Theorem 3.3).

Yang, Mandal and Majumdar (2012b, Section 3.3.1) also compared the time cost of lift-one algorithm with commonly used nonlinear optimization algorithms including Nelder-Mead, quasi-Newton, conjugate gradient, and simulated annealing. Overall, Lift-one algorithm could be 100 times faster than those algorithms. In this paper, we run more simulations to check how the computational time and number of non-zero p_i's vary across the number of factors and range of parameters.

Figure 1: Performance of lift-one algorithm for $m = 2^k$ and $d = k + 1$

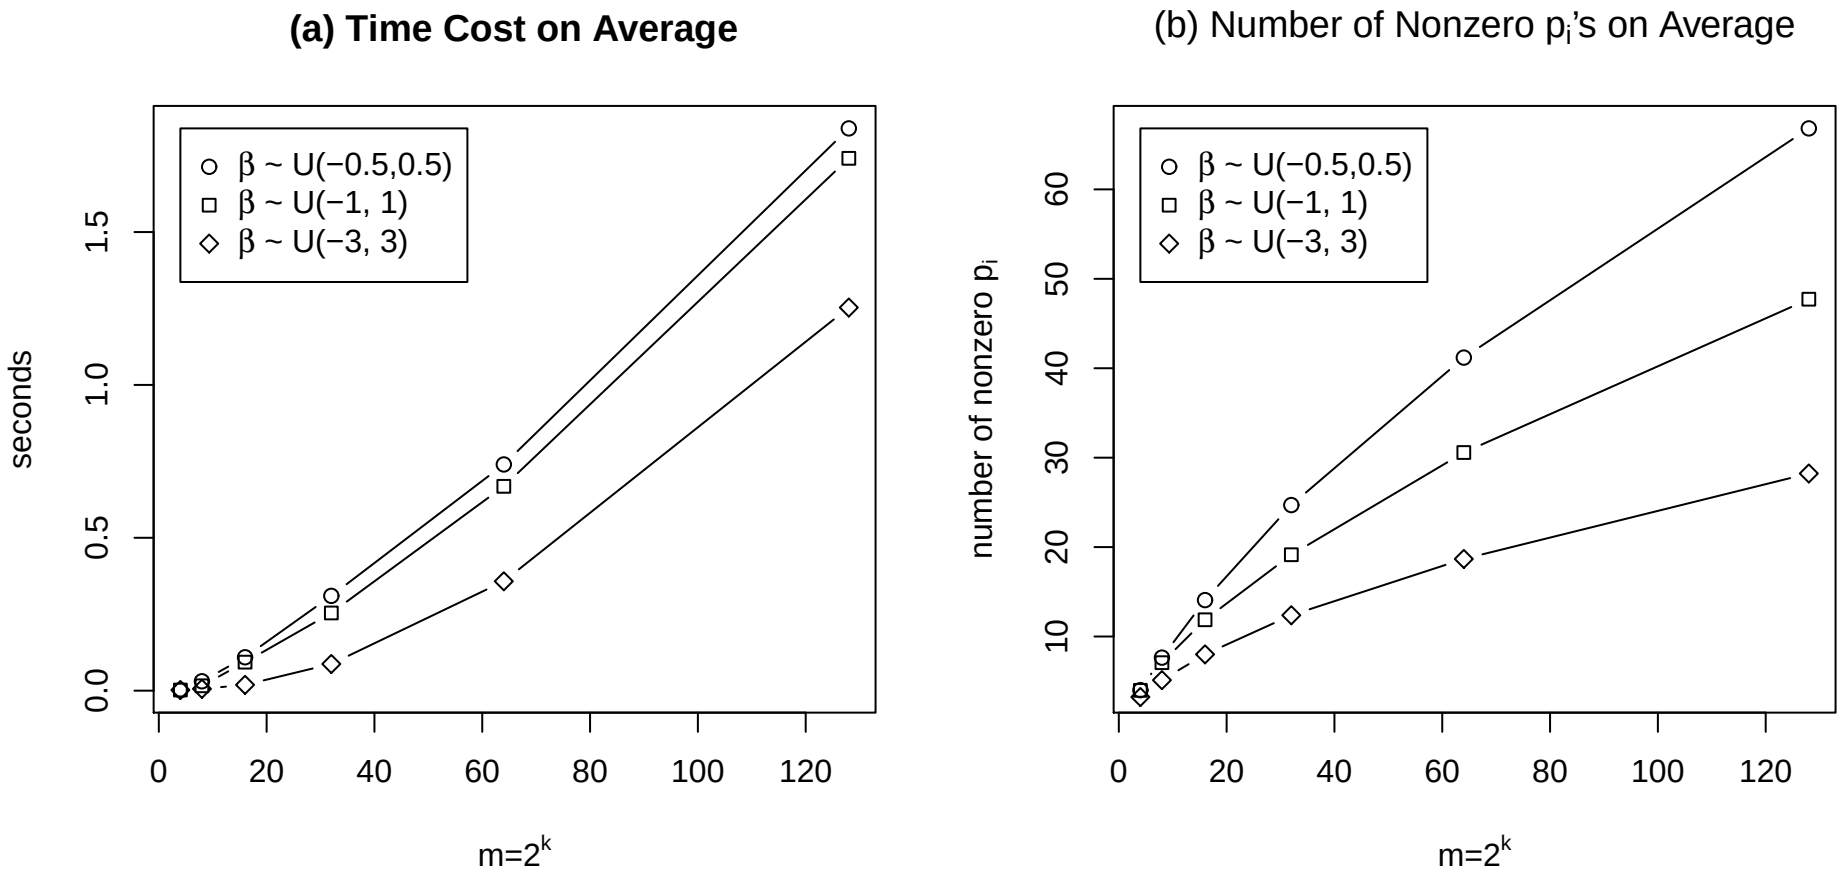

Figure 1 shows the time cost and number of nonzero p_i's on average based on 1000 simulated $\boldsymbol{\beta}$ for 2^k main-effects model with logit link. The time cost is based on a Windows Vista PC with Intel Core2 Duo CPU at 2.27GHz and 2GB memory. The relationship between the time cost and the number of support points $m = 2^k$ is close to linear for moderate k. The time cost on average is only 1.25 secs, 1.74 secs, and 1.84 secs on average for $m = 2^7 = 128$ with β_i's follow iid $U(-3, 3)$, $U(-1, 1)$, and $U(-0.5, 0.5)$, respectively. In the meantime, the corresponding number of nonzero p_i's on average are 28, 48, and 67 respectively.

From a practitioners point of view, it is often desirable to keep the number of support points of a design small. Due to Lemma 4.2, the lift-one algorithm may force a p_i to be exactly zero. It is an advantage over commonly used nonlinear optimization algorithms which may keep an unimportant p_i a tiny value but never let it to be zero. In many cases, it is hard to distinguish "negligible" from "tiny". As the range of β_i's increases from $U(-0.5, 0.5)$ to $U(-3, 3)$, the mean number of nonzero p_i's reduces by one half due to more and more small w_i's are generated.

4.2 Exchange algorithm for D-optimal exact designs

Given the total number of experimental units n, to find D-optimal integer allocation $\mathbf{n} = (n_1, \ldots, n_m)'$, Yang, Mandal and Majumdar (2012b) proposed another algorithm for two-level factors and binary response, called *exchange algorithm*, which adjusts n_i and n_j simultaneously for randomly chosen index pair (i, j). The essentially same algorithm after some modifications could be used for a general design matrix X consisting of real numbers. The goal is to find the optimal $\mathbf{n}$ which maximizes $f(\mathbf{n}) = |X'W_nX|$, where $W_n = \text{diag}\{n_1w_1, \ldots, n_mw_m\}$. To do this, we need a modified version of Lemma 7.5 and Lemma 7.4 in Yang, Mandal and Majumdar (2012b).

Lemma 4.3 *(Yang, Mandal and Majumdar, 2012b, Lemma 7.5) Fixing* $1 \leq i < j \leq m$*, let*

$$\begin{aligned} f_{ij}(z) &= f\left(n_1, \ldots, n_{i-1}, z, n_{i+1}, \ldots, n_{j-1}, s-z, n_{j+1}, \ldots, n_m\right) \\ &\triangleq Az(s-z) + Bz + C(s-z) + D, \end{aligned} \tag{4}$$

where $s = n_i + n_j$*. Then (i)* $D > 0 \Longrightarrow B > 0$ *and* $C > 0$*; (ii)* $B > 0$ *or* $C > 0 \Longrightarrow A > 0$*; (iii)* $f(\mathbf{n}) > 0 \Longrightarrow A > 0$*; (iv)* $D = f(n_1, \ldots, n_{i-1}, 0, n_{i+1}, \ldots, n_{j-1}, 0, n_{j+1}, \ldots, n_m)$*. (v) Suppose* $s > 0$*, then* $A = \frac{2}{s^2}\left(2f_{ij}\left(\frac{s}{2}\right) - f_{ij}(0) - f_{ij}(s)\right)$*,* $B = \frac{1}{s}\left(f_{ij}(s) - D\right)$*,* $C = \frac{1}{s}\left(f_{ij}(0) - D\right)$*.*

Lemma 4.4 *(Yang, Mandal and Majumdar, 2012b, Lemma 7.4) Let* $g(z) = Az(s-z) + Bz + C(s-z) + D$ *for real numbers* $A > 0, B \geq 0, C \geq 0, D \geq 0$*, and integers* $s > 0, 0 \leq z \leq s$*. Let* Δ *be the integer closest to* $\frac{sA+B-C}{2A}$*.*

(i) If $0 \leq \Delta \leq s$*, then* $\max_{0 \leq z \leq s} g(z) = sC + D + (sA + B - C)\Delta - A\Delta^2$ *at* $z = \Delta$*.*

(ii) If $\Delta < 0$*, then* $\max_{0 \leq z \leq s} g(z) = sC + D$ *at* $z = 0$*.*

(iii) If $\Delta > s$*, then* $\max_{0 \leq z \leq s} g(z) = sB + D$ *at* $z = s$*.*

Exchange algorithm for D-optimal integer-valued allocations:

1° Start with initial design $\mathbf{n} = (n_1, \ldots, n_m)'$ such that $f(\mathbf{n}) = |X'W_nX| > 0$.

2° Set up a random order of (i, j) going through all pairs

$$\{(1,2), (1,3), \ldots, (1,m), (2,3), \ldots, (m-1,m)\}$$

3° For each (i, j), let $s = n_i + n_j$. If $s = 0$, let $\mathbf{n}_{ij}^* = \mathbf{n}$. Otherwise, calculate $f_{ij}(z)$ as given in expression (4). Then let

$$\mathbf{n}_{ij}^* = (n_1, \ldots, n_{i-1}, z_*, n_{i+1}, \ldots, n_{j-1}, s - z_*, n_{j+1}, \ldots, n_m)$$

where the integer z_* maximizes $f_{ij}(z)$ with $0 \leq z \leq s$ according to Lemma 4.4. Note that $f(\mathbf{n}_{ij}^*) = f_{ij}(z_*) \geq f(\mathbf{n}) > 0$.

4° Repeat 2° $\sim$ 3° until convergence (no more increase in terms of $f(\mathbf{n})$ by any pairwise adjustment).

5 Real Examples

We use two real examples to show how our results work.

Example 5.1: Paint gun: The following example is taken from Wu and Hamada (2009) and has been modified to suit our purpose. Hale-Bennett and Lin (1997) reported an experiment that was performed to improve a painting process of charcoal grill parts, which are painted with paint guns at different pressures. The optimal paint thickness was reported to be 1.0 mil for the inside of the grill and we consider it unacceptable if the average thickness exceeds that. We consider two factors, namely gun position and pressure, with two and three levels, respectively (for confidentiality, the actual levels were not reported). From Table 6.7 of Wu and Hamada (2009) the resulting experiment can be considered as a uniform design with six replicates and the data are given in Table 5.1. Consider a 2×3 main-effects model with logit link due to insignificant interactions. The design matrix is same as in expression (2). Fitting a logistic regression model, we get $\hat{\boldsymbol{\beta}} = (0.234, -0.237, -0.341, -0.234)'$. If one wants to conduct a follow-up experiment on half-fractions, then it is sensible to use the knowledge obtained by analyzing the data. Instead of taking $\hat{\boldsymbol{\beta}}$ exactly if a point close to it is taken as the initial value, say, $\boldsymbol{\beta} = (0.25, -0.25, -0.30, -0.25)'$, the D-optimal design is $\mathbf{p}_o = (0.162,\ 0.178,\ 0.175,\ 0.175,\ 0.148,\ 0.162)$.

Table 5.1: Paint Data (Hale-Bennett and Lin, 1997)

Gun	Pressure	#success out of 6 replicates
1	1	2
1	2	4
1	3	3
2	1	3
2	2	4
2	3	4

For exact design, again we consider $\boldsymbol{\beta} = (0.25, -0.25, -0.30, -0.25)'$ as the true parameter. Using the exchange algorithm with 36 experimental units, we obtained the D-optimal exact design is $\mathbf{n} = (6, 7, 6, 6, 5, 6)$, which is close the uniform allocation $(6, 6, 6, 6, 6, 6)$.

Example 5.2: Printed Circuit Board: Jeng, Joseph and Wu (2008) reported an experiment on printed circuit boards (PCBs), which has been modified to suit our purpose. This experiment was about inner layer manufacturing of PCBs. Several faults can occur during the manufacturing of PCBs, of which shorts and opens in the circuit are the major ones. In this case, we consider the number of opens as response and two factors at two and three levels respectively. The factors are whether preheating was done or not, and lamination temperature (95°C, 105°C and 115°C). Table 5.2 is obtained from Table 2 of Jeng, Joseph and Wu (2008).

Table 5.2: PCB Data (Jeng, Joseph and Wu, 2008)

Preheat	Temperature	#success out of 480 replicates
1	1	120
1	2	16
1	3	25
2	1	50
2	2	51
2	3	22

Again, as before, the design matrix is given by expression (2). Fitting a logistic regression model, we get $\hat{\boldsymbol{\beta}} = (-2.37, 0.154, 0.717, 0.113)'$. Let us assume that the true $\boldsymbol{\beta}$ as $(-2.5, 0.15, 0.70, 0.10)'$, the D-optimal design is $\mathbf{p}_o = (0.216, 0.186, 0.198, 0.206, 0.115, 0.080)$. Applying the exchange algorithm for integer-valued allocations, we get the optimal allocations as $(621, 535, 569, 593, 331, 231)'$ which is far away from being uniform, each with 480 replicates.

6 Discussion

In this paper, we extended the results of Yang, Mandal and Majumdar (2012b) to more general cases under generalized linear model setup. Our results allow the response could belong to a single-parameter exponential family, which includes Binomial, Poisson, exponential distributions as special cases. Our results also allow a fairly arbitrary set of design points, which could come from combinations of multiple-level factors, or grid points of continuous covariates.

Yang, Mandal and Majumdar (2012b) also proposed EW D-optimal designs which is much easier to compute than the usual Bayesian D-optimal designs and more robust than uniform designs. The same concept and techniques can also be extended to a single-parameter exponential family response with arbitrary but fixed and distinct design points. Their discussion on fractional factorial designs can also extended here. This could be a topic of future research.

Acknowledgments

The research of Abhyuday Mandal was in part supported by NSF Grant DMS-09-0573. The authors are thankful to Professor Dibyen Majumdar for many helpful discussions.

References

1. Dobson, A.J. and Barnett, A. (2008). *An Introduction to Generalized Linear Models*, 3rd edition, Chapman and Hall/CRC.

2. González-Dávila, E., Dorta-Guerra, R. and Ginebra, J. (2007). On the information in two-level experiments, *Model Assisted Statistics and Applications*, **2**, 173−187.

3. Hale-Bennett, C. and Lin, D.K.J. (1997). From SPC to DOE: a Case Study at Meco, Inc., *Quality Engineering*, **9**, 489−502.

4. Jeng, S.-L., Joseph, V. R. and Wu, C.F.J. (2008). Modeling and Analysis for Failure Amplification Method, *Journal of Quality Technology*, Vol. 40, No. 2, 128−139.

5. Khuri, A. I., Mukherjee, B., Sinha, B. K. and Ghosh, M. (2006). "Design issues for generalized linear models: A Review", *Statistical Science*, **21**, 376−399.

6. McCullagh, P. and Nelder, J. (1989). *Generalized Linear Models*, 2nd Edition, Chapman and Hall/CRC.

7. Stufken, J. and Yang, M. (2012), "Optimal designs for generalized linear models, In: *Design and Analysis of Experiments, Volume 3: Special Designs and Applications*, K. Hinkelmann (ed.), Wiley, New York.

8. Woods, D. C., Lewis, S. M., Eccleston, J. A. and Russell, K. G. (2006). "Designs for generalized linear models with several variables and model uncertainty", *Technometrics*, **48**, 284−292.

9. Wu, C.F.J. and Hamada, M.S. (2009). *Experiments: Planning, Analysis, and Optimization*, 2nd edition, Wiley.

10. Yang, J., Mandal, A. and Majumdar, D. (2012a). Optimal Designs for Two-Level Factorial Experiments with Binary Response, *Statistica Sinica*, Vol. 22, No. 2, 885−907.

11. Yang, J., Mandal, A. and Majumdar, D. (2012b). Optimal Designs for 2^k Factorial Experiments with Binary Response, technical report, available at http://arxiv.org/pdf/1109.5320v3.pdf.